


Termik ETG-F-T

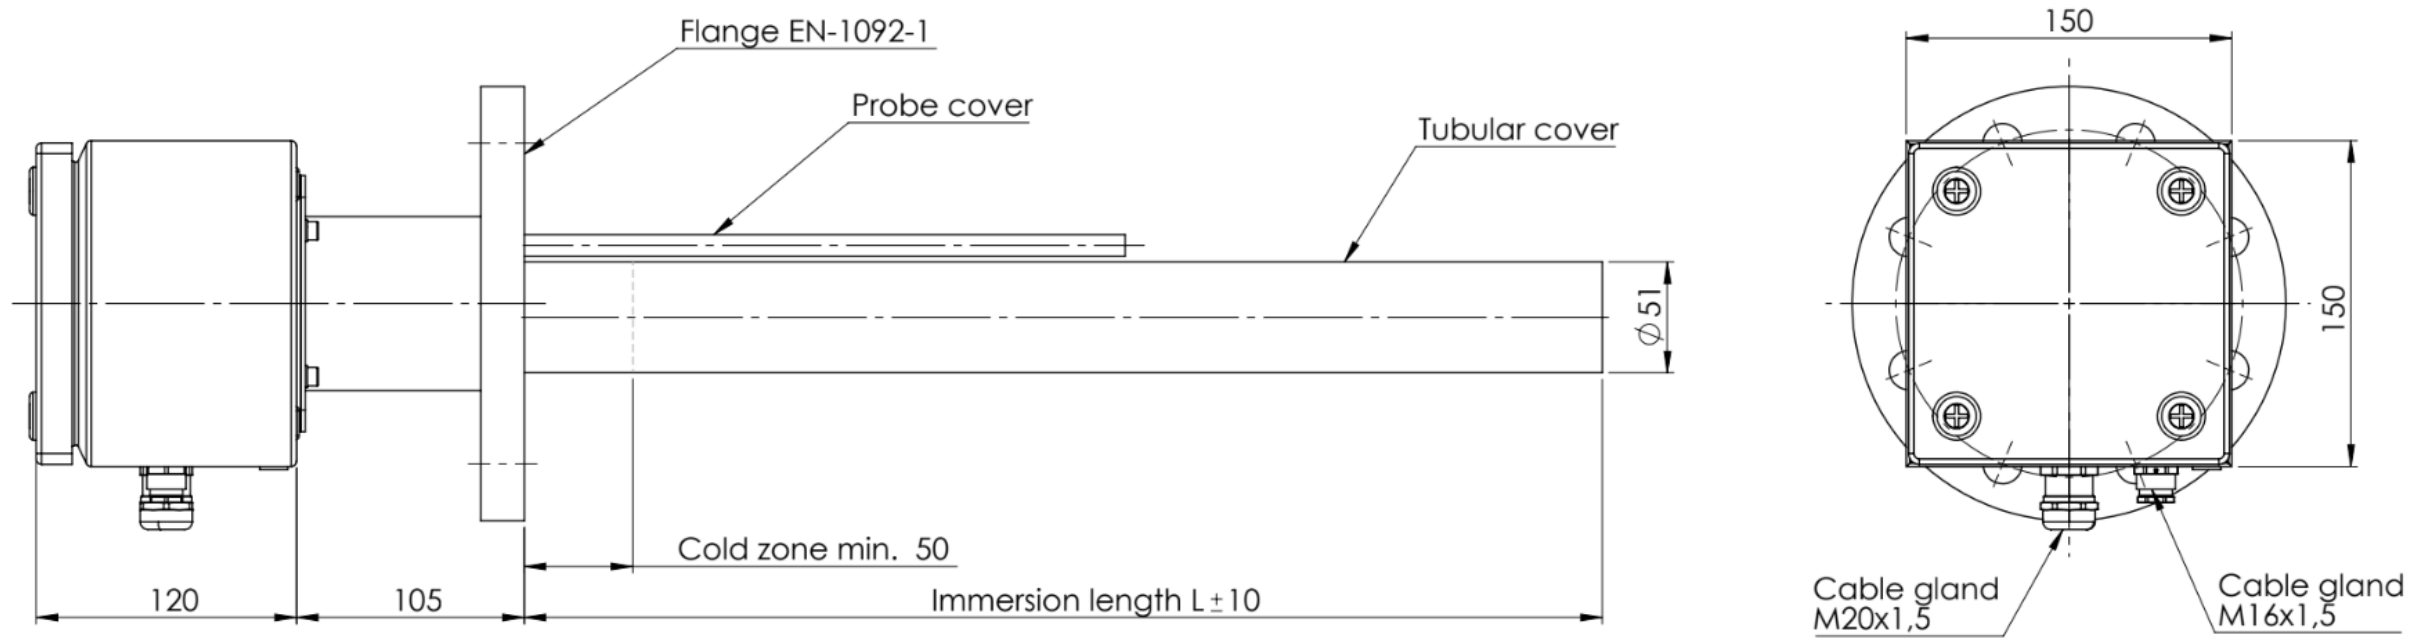

CATALOG NUMBER	COLLAR DN	POWER AT [W/cm ²]"		VOLTAGE [V]	IMMERSION LENGHT [mm]
		1,5	3,0		
18FT-500	cover* Ø 51	1000	-	230	500
18FT-600		1200	-	230	600
18FT-700		1400	-	230/3x400	700
18FT-800		1600	-	3x400	800
18FT-900		1800	-	3x400	900
18FT-1000	DN 50/80/ 100/150 PN16	2000	-	3x400	1000
18FT-1100		2200	-	3x400	1100
18FT-1200	DIN 2527	2400	-	3x400	1200
18FT-1400		2800	-	3x400	1400
18FT-1600		3200	-	3x400	1600
18FT-1800		3700	-	3x400	1800
18FT-2000		4000	-	3x400	2000

* Materiał osłony: 1.4301 / * Inne parametry na zapytanie.

CATALOG NUMBER	COLLAR DN	POWER AT [W/cm ²]"		VOLTAGE [V]	IMMERSION LENGHT [mm]
		1,5	3,0		
19FT-500	cover* Ø 51	-	1900	230	500
19FT-600		-	2400	230	600
19FT-700		-	2800	230/3x400	700
19FT-800		-	3200	3x400	800
19FT-900		-	3700	3x400	900
19FT-1000	DN 50/80/ 100/150 PN16	-	4100	3x400	1000
19FT-1100		-	4300	3x400	1100
19FT-1200	DIN 2527	-	4700	3x400	1200
19FT-1400		-	5500	3x400	1400
19FT-1600		-	6400	3x400	1600
19FT-1800		-	7400	3x400	1800
19FT-2000		-	8100	3x400	2000

* Materiał osłony: 1.4301 / * Inne parametry na zapytanie.