



How to order?

When placing an order,
please specify:



Learn more about this product: →



Type of heater:	ETG-F	-	16F-500 / 1000 W	-	230V	-	250 mm	-	1.4301	-	K	-	3,0	DN	-	IP54	Protection rating
Catalog number / Power [W]																	Collar
Voltage [V]																	40 / 50 / 80
230																	Surface load [W/cm ²]
400																	1,5
3x400																	3,0
Immersion lenght L [mm]																	Cover position
																	Material of casing
																	1.4301
																	1.4404



KONTAKT

Marcinkowo 106,
11-700 Mrągowo

tel. +48 89 741 73 75
NIP: 7421805638

info@termik.pl
www.termik.pl



YouTube

youtube.com/@termik_pl/videos



ETG-F

Removable cartridge immersion heaters



Learn more about this product: →



✓ Features:

- Heater mounted on screws to the flange
- Replaceable heating element without the need to drain fluid from the tank
- Modular housing
- Durable construction
- Easy installation
- Surface load capacity of 1.5W/cm² for oil
- Surface load capacity of 3.0W/cm² for water and similar fluids

✓ Applications:


Water heating,
Oil heating,
Heating of technological
baths

↓ Protection rating: IP54

i Technical Specifications:

Power [W]	1000-8100
Voltage [V]	230, 400, 3x400
Length [mm]	500-2000
Diameter [mm]	51
Material of casing, threaded heads	stal nierdzewna
Flange diameter	DN 40/50/80 PN16
Threaded connection	M5
Connection protection	plastic (axial/angle) or metal cover
Protection rating	IP54
Cold Zone	min. 50mm
Operating conditions	Horizontal

Termik ETG-F with metal cover

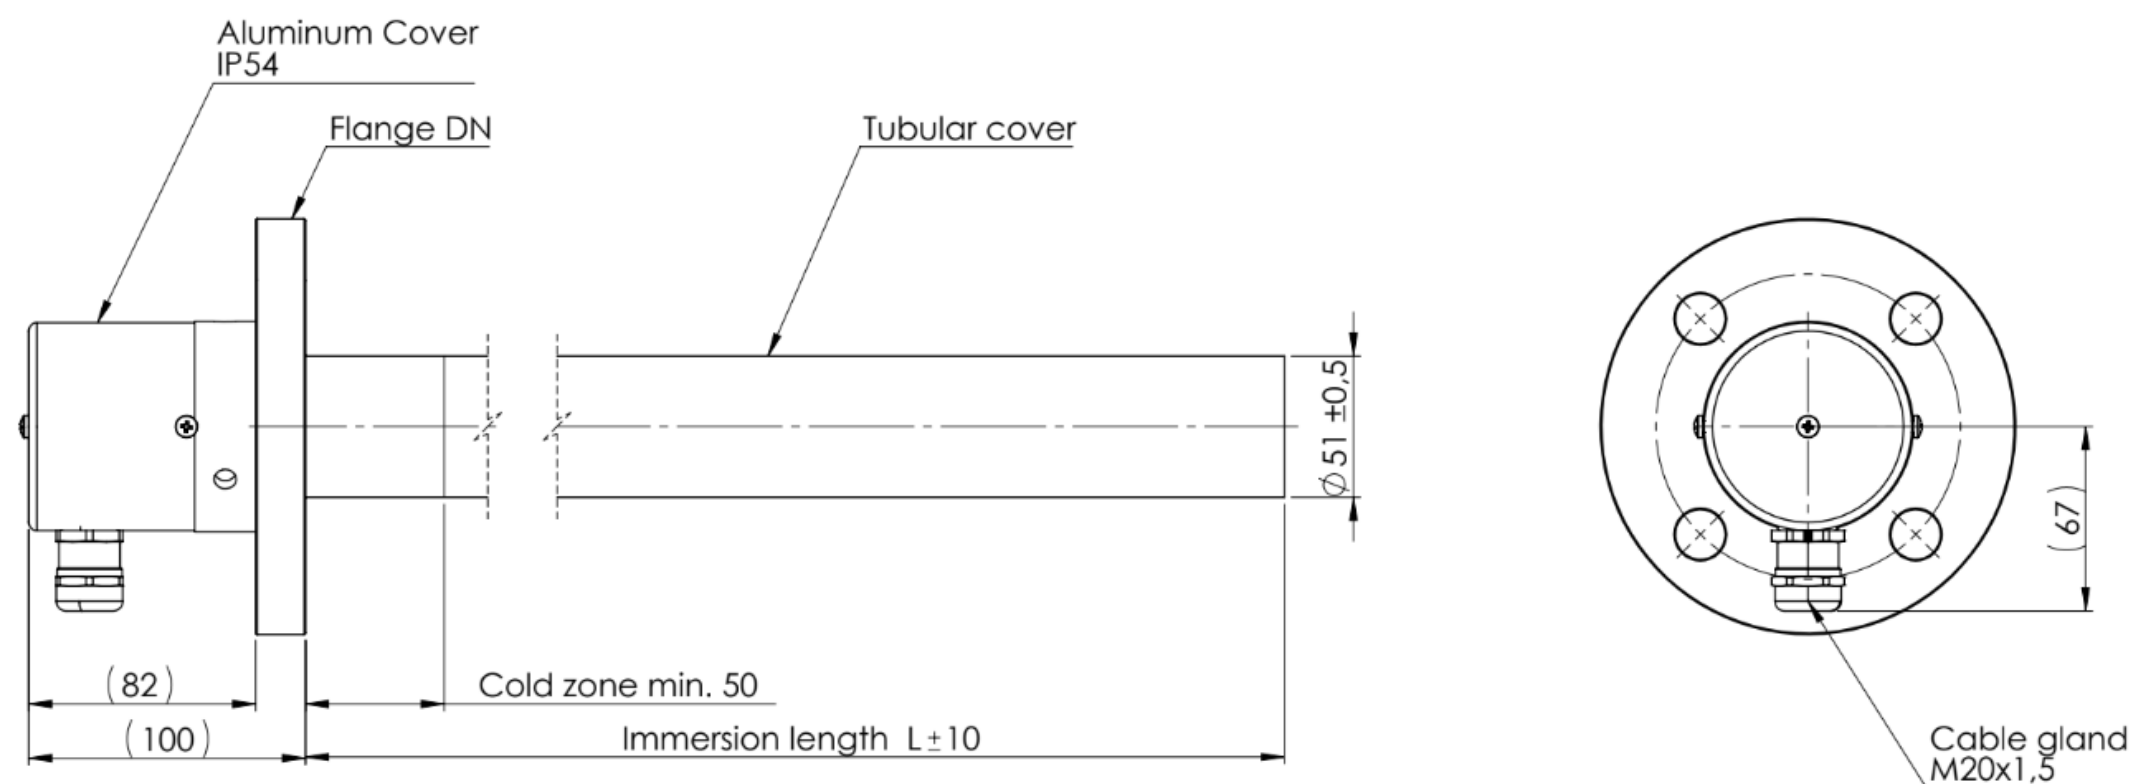

CATALOG NUMBER	COLLAR DN	POWER AT [W/cm ²]" 1,53,0		VOLTAGE [V]	IMMERSION LENGHT [mm]
16F-500	cover* Ø 51	1000	-	230	500
16F-600		1200	-	230	600
16F-700		1400	-	230/3x400	700
16F-800		1600	-	3x400	800
16F-900		1800	-	3x400	900
16F-1000	DN 40/50/80 PN16	2000	-	3x400	1000
16F-1100		2200	-	3x400	1100
16F-1200	DIN 2527	2400	-	3x400	1200
16F-1400		2800	-	3x400	1400
16F-1600		3200	-	3x400	1600
16F-1800		3700	-	3x400	1800
16F-2000		4000	-	3x400	2000

* Material of casing: 1.4301 / * Other parameters on request.

CATALOG NUMBER	COLLAR DN	POWER AT [W/cm ²]" 1,53,0		VOLTAGE [V]	IMMERSION LENGHT [mm]
17F-500	cover* Ø 51	-	1900	230	500
17F-600		-	2400	230	600
17F-700		-	2800	230/3x400	700
17F-800		-	3200	3x400	800
17F-900		-	3700	3x400	900
17F-1000	DN 40/50/80 PN16	-	4100	3x400	1000
17F-1100		-	4300	3x400	1100
17F-1200	DIN 2527	-	4700	3x400	1200
17F-1400		-	5500	3x400	1400
17F-1600		-	6400	3x400	1600
17F-1800		-	7400	3x400	1800
17F-2000		-	8100	3x400	2000

* Material of casing: 1.4301 / * Other parameters on request.