

How to order?

When placing an order,
please specify:



Learn more about this product: →



ETG-M	-	09M-300 / 250W	-	230V	-	G2"	-	250	-	carbon steel	-	K	-	0,8	-	IP65
Type of heater:																Protection rating
Catalog number / Power [W]																Surface load [W/cm ²]
Voltage [V]																0,8
230																1,5
400																Cover position
3x400																
Thread ["]																
G1 1/2																
G2																
Immersion lenght L [mm]																Material of casing

* Other parameters on request.



KONTAKT

Marcinkowo 106,
11-700 Mrągowo

tel. +48 89 741 73 75
NIP: 7421805638

info@termik.pl
www.termik.pl



YouTube

youtube.com/@termik_pl/videos

ETG-M

Removable cartridge immersion heaters



Learn more about this product: →



✓ Features:

- Screw-in heater compatible with a hydraulic wrench
- Replaceable heating cartridge without draining the tank
- Modular housing
- Durable construction
- Easy installation
- Maximum surface load: 1.5 W/cm²

✓ Applications:

Heating of hydraulic oil,
Heating of thermal oil,
Heating of lubricating
oil and similar fluids


📦 Protection rating: IP65

i Technical Data:

Power [W]	250-4400
Voltage [V]	230, 400, 3x400
Length [mm]	300-2000
Diameter [mm]	40/53
Material of casing, threaded heads	carbon steel
Threaded connection	G1 1/2" (SW65), G2" (SW70)
Connection protection	angled metal cover
Protection rating	IP65
Cold Zone	min. 50mm
Operating conditions	Horizontal

Grzałka rurowa
Termik ETG-M

Thread G1 ½"

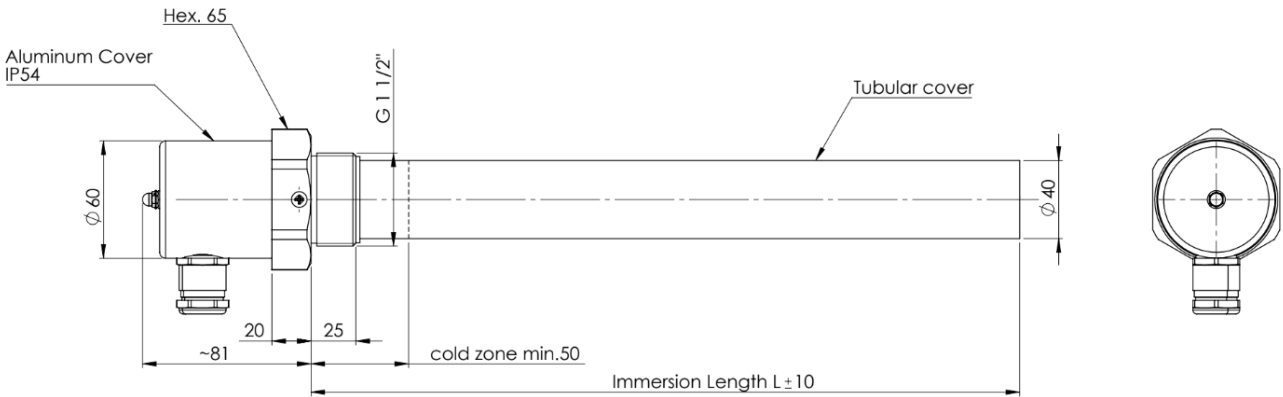


CATALOG NUMBER	THREAD [G"]	POWER AT [W/cm]" 1,5	3,0	VOLTAGE [V]	IMMERSION LENGHT [mm]
09M-300	G1 ½" cover* Ø40	250	-	230	300
09M-400		300	-	230	400
09M-500		400	-	230	500
09M-600		500	-	230	600
09M-700		600	-	230/400	700
09M-800		700	-	230/400	800
09M-900		800	-	230/400	900
09M-1000		900	-	230/400	1000
09M-1100		1000	-	230/400	1100
09M-1200		1100	-	230/400	1200
09M-1400		1200	-	230/400	1400
09M-1600		1400	-	230/3x400	1600
09M-1800		1600	-	230/3x400	1800
09M-2000		1800	-	230/3x400	2000
10M-300		-	450	230	300
10M-400		-	600	230	400
10M-500		-	700	230	500
10M-600		-	950	230	600
10M-700		-	1100	230/400	700
10M-800		-	1250	230/400	800
10M-900		-	1400	230/400	900
10M-1000		-	1600	230/3x400	1000
10M-1100		-	1700	230/3x400	1100
10M-1200		-	1900	230/3x400	1200
10M-1400		-	2200	3x400	1400
10M-1600		-	2500	3x400	1600
10M-1800		-	2900	3x400	1800
10M-2000		-	3300	3x400	2000

* Other parameters on request.

Grzałka rurowa
Termik ETG-M

Thread G2

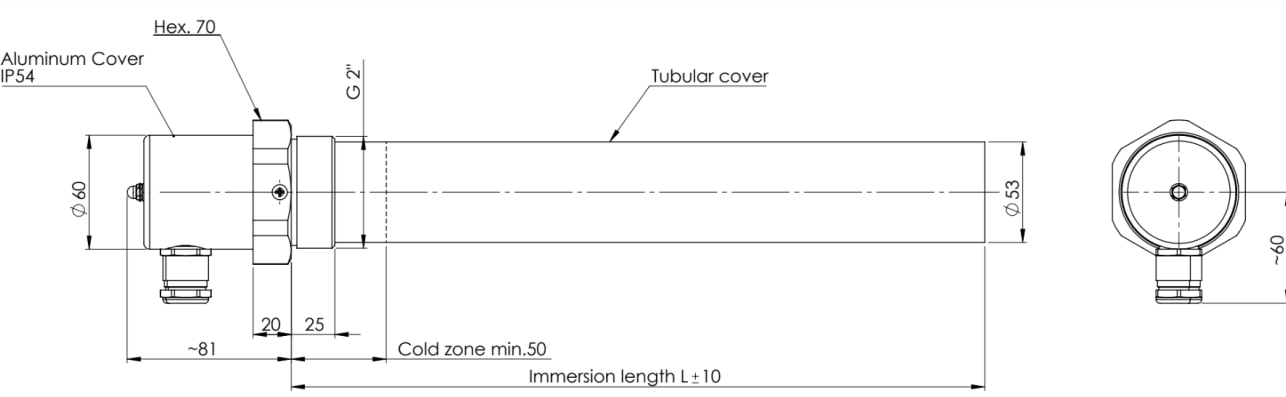

CATALOG NUMBER	THREAD [G"]	POWER AT [W/cm]" 1,5	3,0	VOLTAGE [V]	IMMERSION LENGHT [mm]
11M-300	G2" cover* Ø53	300	-	230	300
11M-400		450	-	230	400
11M-500		550	-	230	500
11M-600		700	-	230	600
11M-700		850	-	230/400	700
11M-800		950	-	230/400	800
11M-900		1100	-	230/3x400	900
11M-1000		1250	-	230/3x400	1000
11M-1100		1350	-	230/3x400	1100
11M-1200		1500	-	230/3x400	1200
11M-1400		1750	-	230/3x400	1400
11M-1600		2050	-	230/3x400	1600
11M-1800		2300	-	3x400	1800
11M-2000		2550	-	3x400	2000
12M-300		-	500	230	300
12M-400		-	800	230	400
12M-500		-	1000	230	500
12M-600		-	1300	230	600
12M-700		-	1500	230/3x400	700
12M-800		-	1700	230/3x400	800
12M-900		-	2000	230/3x400	900
12M-1000		-	2200	3x400	1000
12M-1100		-	2400	3x400	1100
12M-1200		-	2600	3x400	1200
12M-1400		-	3000	3x400	1400
12M-1600		-	3500	3x400	1600
12M-1800		-	4000	3x400	1800
12M-2000		-	4400	3x400	2000

* Other parameters on request.