



How to order?

When placing an order,
please specify:



Learn more about this product: →



ETG-T	-	14T-300 / 350 W	-	230V	-	250 mm	-	1.4301	-	K	-	3,0	-	IP54
Type of heater:														Protection rating
Catalog number / Power [W]														Surface load [W/cm ²]
Voltage [V]														Cover position
230														1,5
400														3,0
3x400														
Immersion lenght L [mm]														Material of casing
														1.4301
														1.4404



KONTAKT

Marcinkowo 106,
11-700 Mrągowo

tel. +48 89 741 73 75
NIP: 7421805638

info@termik.pl
www.termik.pl



YouTube

youtube.com/@termik_pl/videos

ETG-T

Removable cartridge immersion heaters



Learn more about this product: →



✓ Features:

- Heater screwed in with a hook key
- Replaceable heating element without the need to empty the fluid from the tank
- Modular housing
- Durable construction
- Easy installation
- Surface load capacity of 1.5W/cm² for oil
- Surface load capacity of 3.0W/cm² for water and similar fluids

✓ Applications:

Heating of water,
Heating of oil,
Heating of technological
baths




Protection rating: IP54

i Technical specifications:

Power [W]	350-2500
Voltage [V]	230, 400, 3x400
Length [mm]	300-1000
Diameter [mm]	35
Material of casing, threaded heads	steel 1.4301
Threaded connection	G2"
Connection protection	plastic cover (angled)
Protection rating	IP54
Cold Zone	min. 50mm
Operating conditions	Horizontal
Temperature control	0-40°C, 0-120°C, 2-77°C, 30-75°C*, 30-85°C* (*400V)

Termik ETG-T

G2"

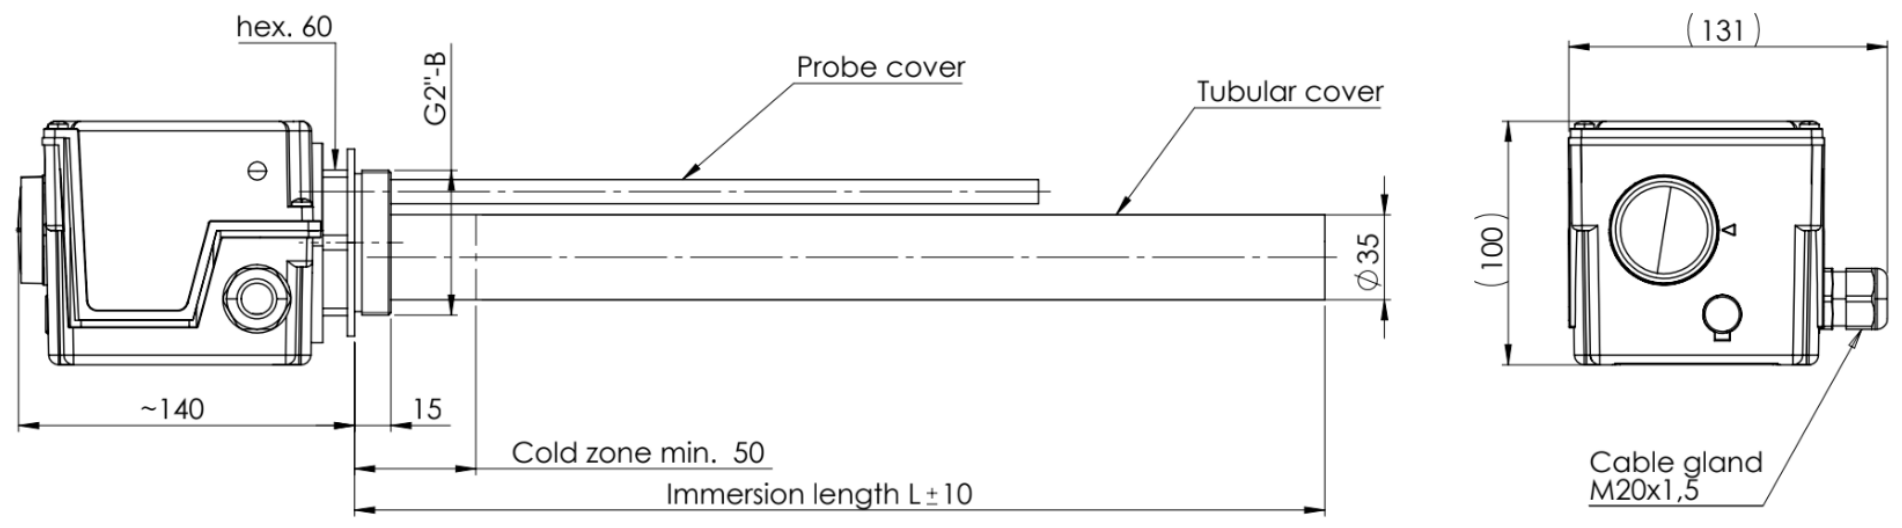

CATALOG NUMBER	THREAD [G"]	POWER AT [W/cm²]"		VOLTAGE [V]	IMMERSION LENGHT [mm]
		1,5	3,0		
14T-300	G2", cover* Ø 51	350	-	230	300
14T-400		500	-	230	400
14T-500		600	-	230	500
14T-600		750	-	230	600
14T-700		900	-	230/400	700
14T-800		1000	-	230/400	800
14T-900		1200	-	230/400	900
14T-1000		1300	-	230/400	1000
15T-300		-	700	230	300
15T-400		-	1000	230	400
15T-500		-	1200	230	500
15T-600		-	1500	230	600
15T-700		-	1800	230/3X400	700
15T-800		-	2000	3x400	800
15T-900		-	2300	3x400	900
15T-1000		-	2500	3x400	1000

* Material of casing: 1.4301 / * Other parameters on request.