




2 LATA
GWARANCJI



Flow heater

Termik PPW

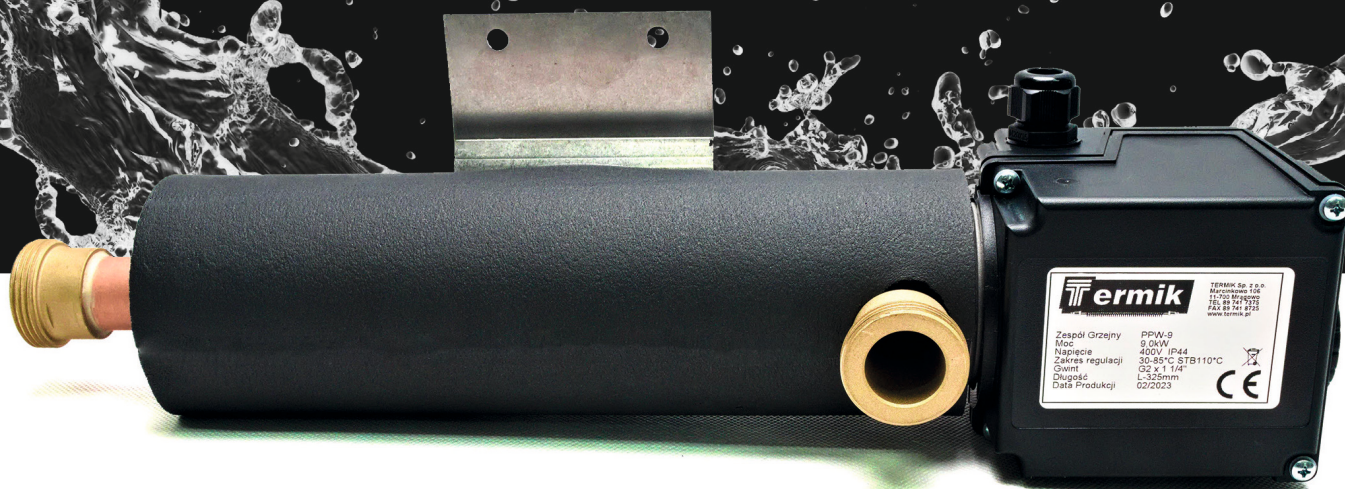

Application:

- heat pumps,
- central heating systems





Temperature control
range:

30 - 75°C

STANDARD

30 - 85°C

OPTION

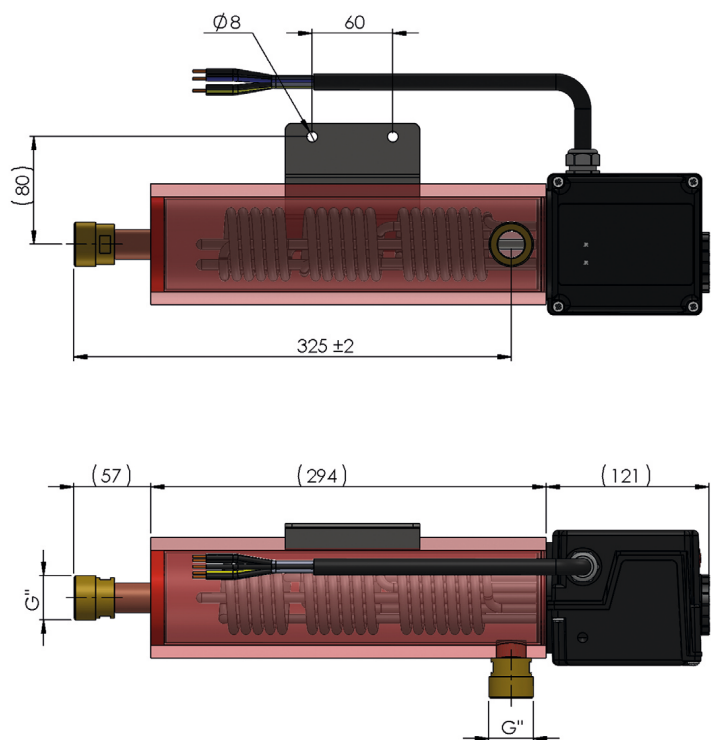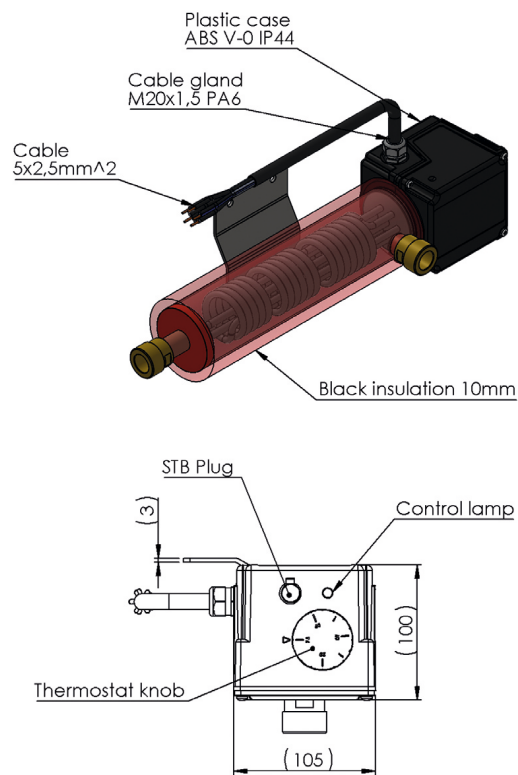

MODEL	POWER	VOLTAGE	LENGTH	THERMOSTAT	CONNECTIONS
PPW - 3	3.00 kW	400 V	325 mm	TR30-75°C STB98°	from 3/4 " to 1 1/4 "
PPW - 6	6.00 kW	400 V	325 mm	TR30-75°C STB98°	from 3/4 " to 1 1/4 "
PPW - 9	9.00 kW	400 V	325 mm	TR30-75°C STB98°	from 3/4 " to 1 1/4 "



MATERIAL
Stainless steel

ADDITIONALLY
Flow heater is equipped with a 2 meter cable as a standard.



CONTACT
Marcinkowo 106, tel. +48 89 741 73 75 info@termik.pl
11-700 Mrągowo fax. +48 89 741 87 25 www.termik.pl



youtube.com/@termik_pl/videos