



2 LATA
GWARANCJI



Termik WPI

Screw-in immersion heaters -
isolated version



✓ Application:

enamelled tanks

🔥 Temperature set:

30 – 75°C

STANDARD

98°C

LIMITER

🔧 Working pressure:


max 10Bar

⚡ Protection:

IP54

ℹ Product information:

Immersion heater with integrated isolation for direct water heating, especially useful in enamelled water tanks. It consists of 3 "U"-shaped tubular heating elements and a sensor protection tube, which are mounted in a screw head G 6/4". The heater is with a plastic housing, in which a temperature control (30-75°) with a limiter (98°) and an indicator lamp is provided. The isolated construction of the tubular heater protects enamelled tank against corrosion.

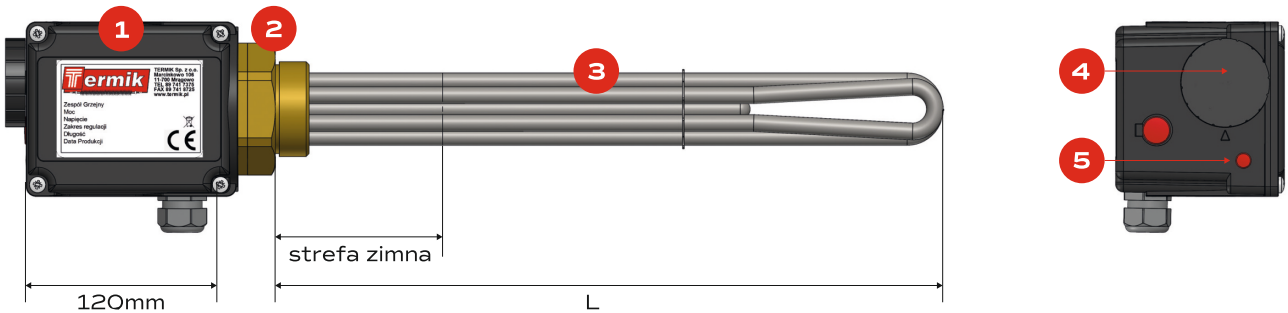

Details

1. Protective cap ABS V-O IP54

2. Plug G 6/4" SW60

3. Tube sheath Icoloy 825
4. Built-on thermostat with STB limiter

5. Indicator lamp (red)

MODEL	POWER	VOLTAGE	IMMERSION LENGTH	THERMOSTAT	WATT CAPACITY
WPI - 2.5	2500W	230/400V	370 mm	TR30-75°C STB98°	~6.2W/cm
WPI - 3.0	3000W	230/400V	390 mm	TR30-75°C STB98°	~6.7W/cm
WPI - 4.5	4500W	400V	470 mm	TR30-75°C STB98°	~8.0W/cm
WPI - 6.0	6000W	400V	560 mm	TR30-75°C STB98°	~8.4W/cm
WPI - 7.5	7500W	400V	650 mm	TR30-75°C STB98°	~8.7W/cm
WPI - 9.0	9000W	400V	720 mm	TR30-75°C STB98	~9.3W/cm
WPI - 12.0	12000W	3 x 400V	900 mm	TR30-75°C STB98°	~9.8W/cm



CONTACT

Marcinkowo 106,
11-700 Mrągowo

tel. +48 89 741 73 75
fax. +48 89 741 87 25

info@termik.pl
www.termik.pl



youtube.com/@termik_pl/videos