




Termik **TER**

To water heaters

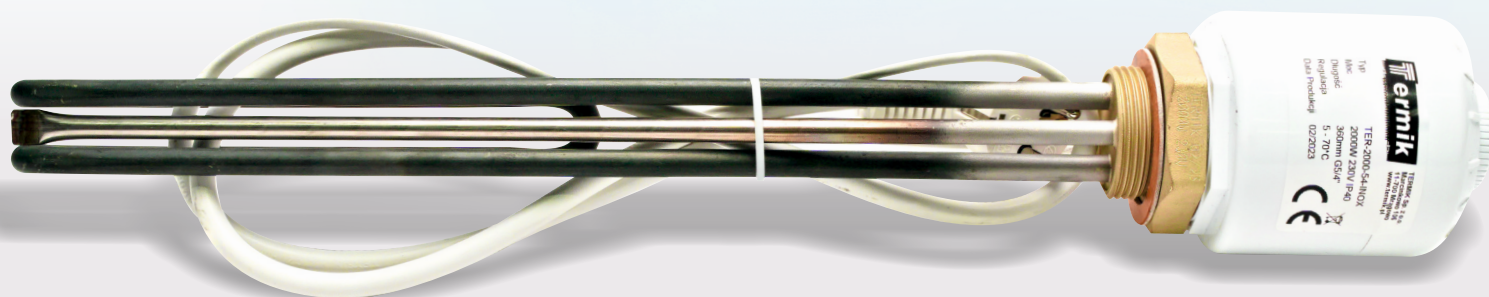

- ✓ **Application:**
water heaters, buffer tanks,
accumulation tanks,
stainless steel tanks


- ⌚ **Temperature set:**
5-70°C

- ✓ **ECO - optimal**
set-point position 55°C

- ✓ **Independent non self-resetting**
safety option TRX 87°C

**Heating element with
thermostat
TER-INOX**



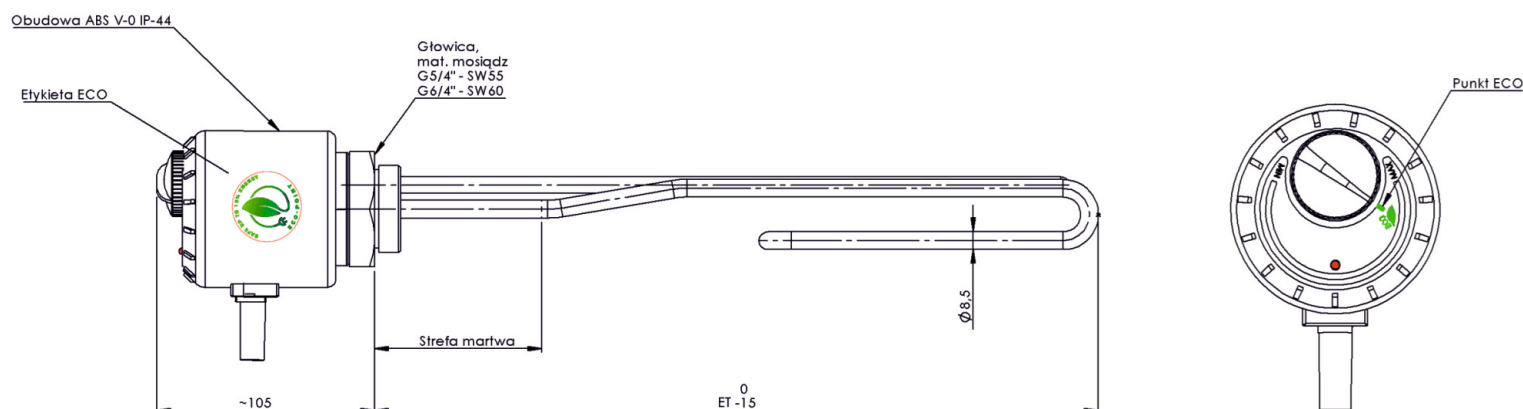

The heaters are made of acid-resistant stainless steel type INCOLOY 800 (EN 1.4876).

They can work in stainless tanks.

The heater is equipped in 1500 mm power cord with a plug.

Meets the latest quality standards PN-EN 60335-1:2012, LVD 2014/35/EU.

TYPE	POWER [W]	VOLTAGE [V]	LENGTH OF IMMERSION [mm]	COLD ZONE [mm]	THREADED CONNECTION	NET WEIGHT [kg]
TERi-1500-54-INOX	1500	230~	360	80	5/4"	0,96
TERi-2000-54-INOX	2000	230~	360	80	5/4"	0,98
TERi-3000-54-INOX	3000	230~	400	80	5/4"	1,00
TERi-1500-64-INOX	1500	230~	360	80	6/4"	0,98
TERi-2000-64-INOX	2000	230~	360	80	6/4"	1,00
TERi-3000-64-INOX	3000	230~	400	80	6/4"	1,02



KONTAKT

Marcinkowo 106,
11-700 Mrągowo

tel. +48 89 741 73 75
fax. +48 89 741 87 25

info@termik.pl
www.termik.pl



youtube.com/@termik_pl/videos