




# Termik **TER**

## To water heaters

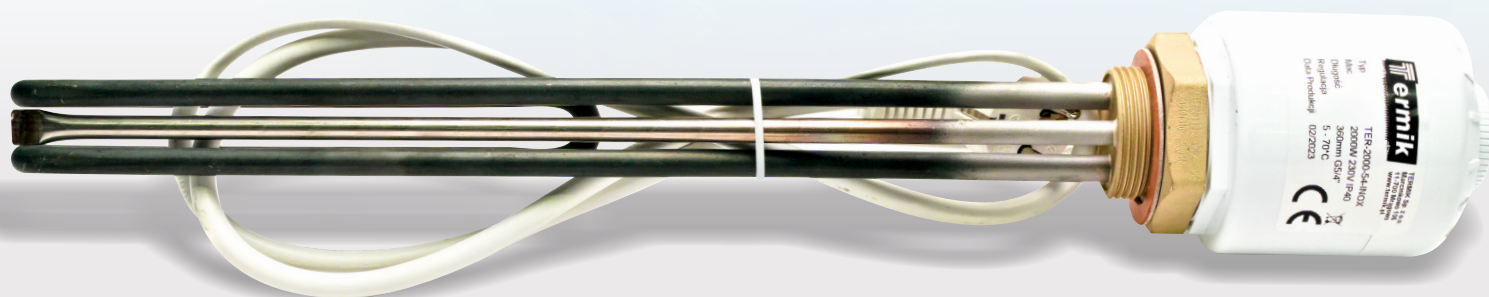

- ✓ **Application:**  
water heaters, buffer tanks,  
accumulation tanks,  
stainless steel tanks


- ⌚ **Temperature set:**  
5 - 70°C

- ✓ **ECO - optimal**  
set-point position 55°C

- ✓ **Independent non self-resetting**  
safety option TRX 87°C

**Heating element with  
thermostat  
**TER-INOX****



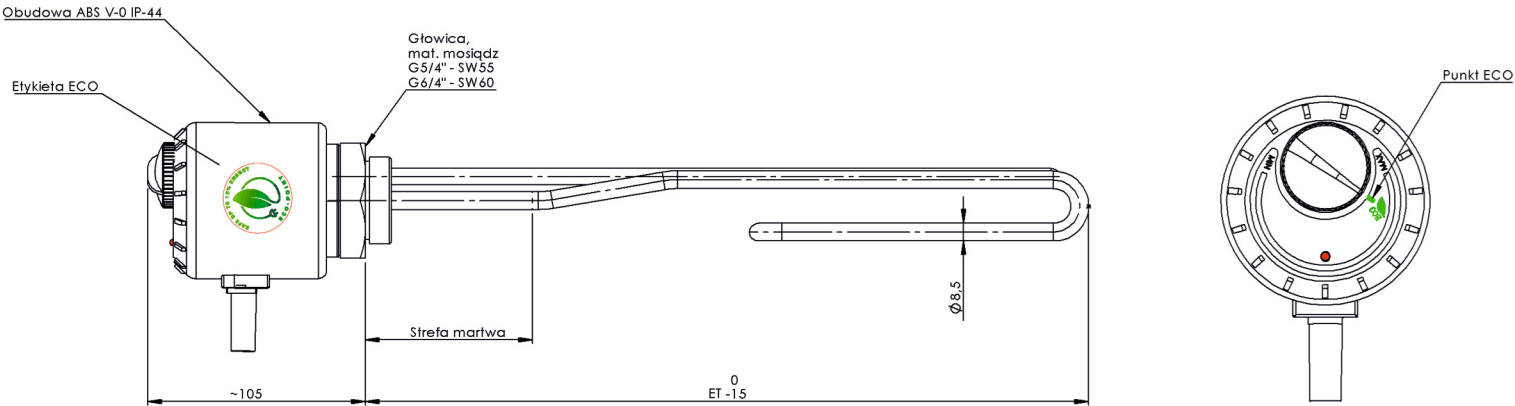

Heating elements are made of Incoloy material. They can work in stainless tanks.

The heater is equipped in 1500 mm power cord with a plug.

Meets the latest quality standards PN-EN 60335-1:2012, LVD 2014/35/EU.

| TYPE              | POWER [W] | VOLTAGE [V] | LENGTH OF IMMERSION [mm] | COLD ZONE [mm] | THREADED CONNECTION | NET WEIGHT [kg] |
|-------------------|-----------|-------------|--------------------------|----------------|---------------------|-----------------|
| TERi-1500-54-INOX | 1500      | 230~        | 360                      | 80             | 5/4"                | 0,96            |
| TERi-2000-54-INOX | 2000      | 230~        | 360                      | 80             | 5/4"                | 0,98            |
| TERi-3000-54-INOX | 3000      | 230~        | 400                      | 80             | 5/4"                | 1,00            |
| TERi-1500-64-INOX | 1500      | 230~        | 360                      | 80             | 6/4"                | 0,98            |
| TERi-2000-64-INOX | 2000      | 230~        | 360                      | 80             | 6/4"                | 1,00            |
| TERi-3000-64-INOX | 3000      | 230~        | 400                      | 80             | 6/4"                | 1,02            |



**KONTAKT**

Marcinkowo 106,      tel. +48 89 741 73 75      info@termik.pl  
11-700 Mragowo      fax. +48 89 741 87 25      www.termik.pl



youtube.com/@termik\_pl/videos