



How to order?

When placing an order,
please specify:



Learn more about this product: →



ETG-S	-	13S-400 / 1400 W	-	230V	-	250 mm	-	1.4301	-	K	-	3,0	-	IP54
Type of heater:												Protection rating		
Catalog number / Power [W]												Surface load [W/cm ²]		
Voltage [V]												Cover position		
230														
400														
3x400														
Immersion lenght L [mm]												Material of casing		
												1.4301		
												1.4404		
												1.4571		



KONTAKT

Marcinkowo 106,
11-700 Mrągowo


tel. +48 89 741 73 75
NIP: 7421805638

info@termik.pl
www.termik.pl



YouTube

youtube.com/@termik_pl/videos

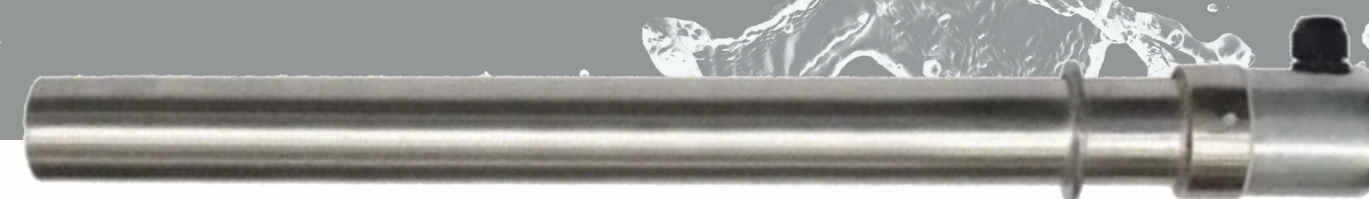

ETG-S

Removable cartridge immersion heaters



Learn more about this product: →



✓ Features:

- Heater with a flange for welding into the tank wall
- Replaceable heating insert without the need to drain the fluid from the tank
- Modular housing
- Durable construction
- Easy installation
- Surface load capacity: 3.0 cm² for water and similar fluids

✓ Applications:

Heating water,
Heating technological
baths




Protection rating: IP54

i Technical Data:

Power [W]	1400-8100
Voltage [V]	230, 400, 3x400
Length [mm]	400-2000
Diameter [mm]	51
Material of casing, threaded heads	stainless steel
Threaded connection	M5
Connection protection	metal cover (angular)
Protection rating	IP54
Cold Zone	min. 50mm
Operating conditions	Horizontal

Termik ETG-S

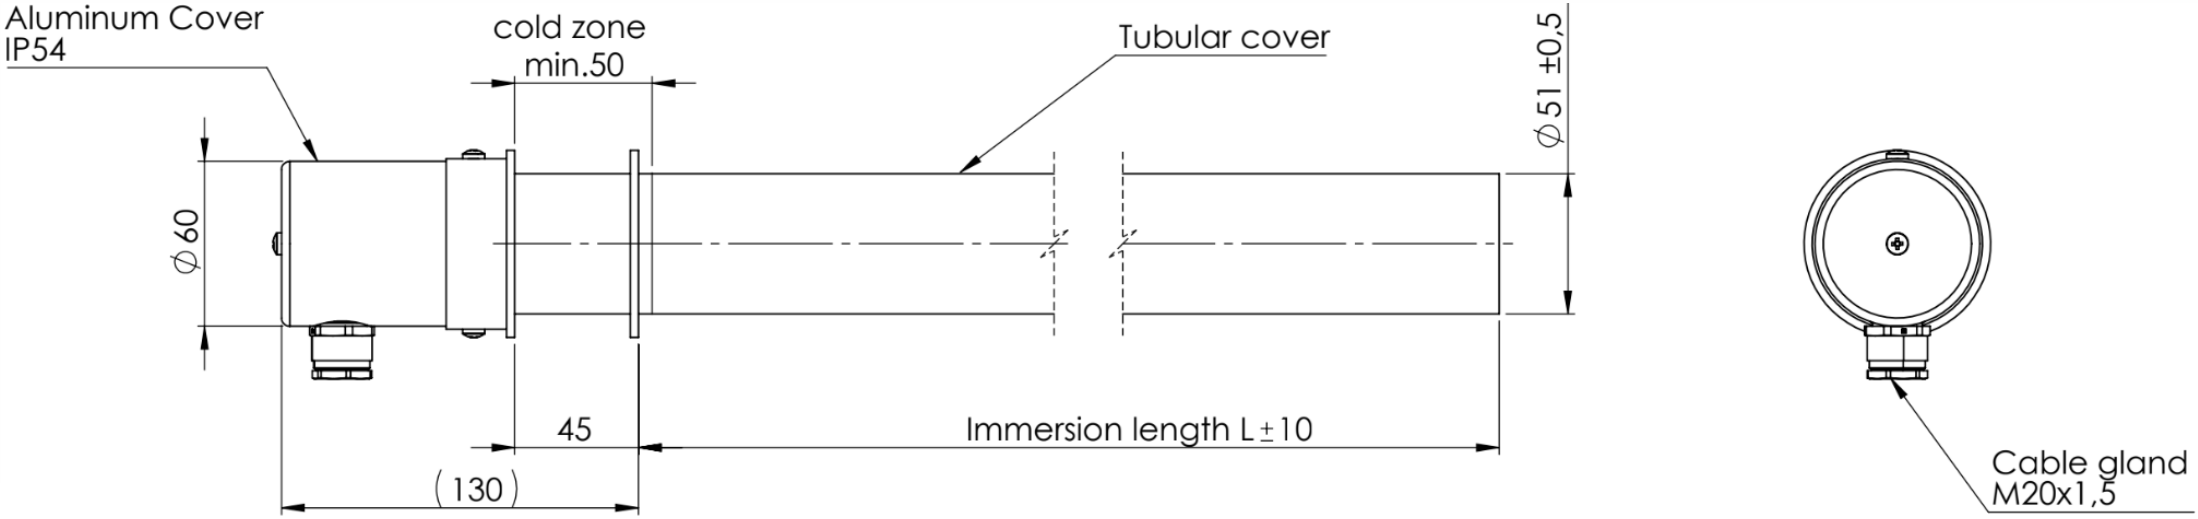

CATALOG NUMBER	COLLAR D68	POWER AT [W/cm ²]" 3,0	VOLTAGE [V]	IMMERSION LENGHT [mm]
13S-400	cover* Ø51	1400	230	400
13S-500		1900	230	500
13S-600		2400	230	600
13S-700		2800	3x400	700
13S-800		3200	3x400	800
13S-900		3700	3x400	900
13S-1000		4100	3x400	1000
13S-1100		4300	3x400	1100
13S-1200		5100	3x400	1200
13S-1400		5500	3x400	1400
13S-1600		6400	3x400	1600
13S-1800		7400	3x400	1800
13S-2000		8100	3x400	2000

* Materiał osłony: 1.4301 / * Inne parametry na zapytanie.